Technical Data Sheet

Nitrocellulose (Hacocell / Hacoplast)



Type Norm Type of solubility 23 A Ester Alcohol Special/Medium alcohol **AH 22**

Properties/Application


Medium viscosity NC for the manufacture of quick-drying lacquers

Main application fields: dipping varnish, spray lacquers, wood lacquers




Viscosity according to ISO 14446	[mPa s]	400 ± 25	Solvents for nitrocellulose	je j
Nitrogen NC-V006A	[%]	10,9 - 11,3		ketone ester glycolether alcohol benzene H
Colour NC-V009A/C	[APHA-selekt] [Gardner]	≤ 300 ≤ 2,5	genuine solvent	✓ ✓ ✓
			latent solvent	✓
Solubility in Ethanol NC-V012	[%]	≥ 60	diluting agent (non-solvent)	✓ ✓

Product variants

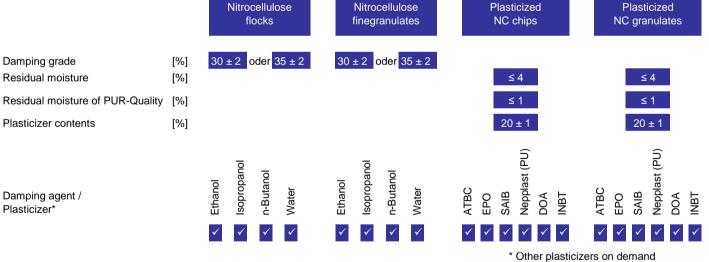

Supply form



Concerning security measures at handling and danger instructions for storing and transporting, please, refer to the information sheet M 037 12/93 of the Employers'/Employee's Liability Insurance Association of the Chemical Industry and also to our Material Safety Data Sheet and our Transport Safety Data Sheet. The information in this publication, and any subsequent advice of a technical nature given either by word of mouth or in writing, is based on our know-how and experience. It is however the responsibility of the customer to verify whether our products are suitable for the range of application in each individual case, and to have due regard to rights of Third parties which may be in contrast with the processing or any other kind of use. No claims whatever can be brought against us on the basis on the information contained in this publication, or of any advice of a technical nature which may subsequently be given. This publication become void once a re-edition will be published. (edition 07/2013)